




Monitor


MCM-422 JustTOUCH Wide 21.5" P-CAP Touch Screen Monitor



Housing in a modern design
with easy cable access




7H Hardness Durable Glass



Versatile connectivity thanks to
modern common interfaces



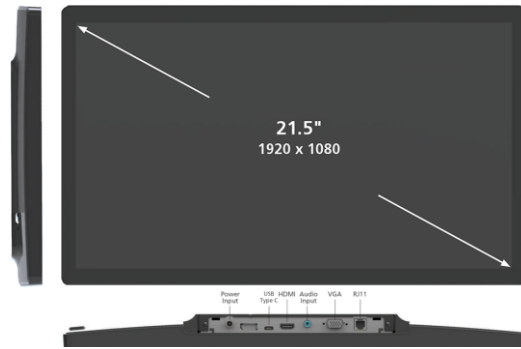

Model Name		MCM-422
Housing		
Material	Plastic ,Glass, SECC Metal	
Mounting	VESA 100 x 100 mm	
Display / Touch		
Dimension Display	21.5" TFT LCD	
Brightness	405 nits	
Contrast Ratio	1000:1	
Response Time	TR=16, TF=7	
Resolution max.	1920 x 1080 pixel	
Aspect ratio	16:9	
Viewing angle	H:178° , V:178°	
Glas-Finish	7H Hardness durable glass	
Touch Display	Projected Capacitive, 10-point multi-touch	
Touch Screen Interface	USB-HID	
DC Power		
	DC In 12V Jack Power Input 50W (12VDC/4.16A)	
I/O Ports		
USB-C	1x USB-C Display Port (Alt Mode for DP video support)	
VGA	1 x VGA	
HDMI	1 x HDMI	
Audio in / Speaker	1 x 3.5mm audio jack connector / 2 x 2W speaker	
Standards		
	CE, FCC, LVD, RoHS	
Power Consumption		
	~ 45W	
Operating Temperature		
	0° C ~ 40° C	
Operating Humidity		
	20% ~ 80% RH. Non-Condensing	
Physical Prperties		
Dimension (W x D x H), Weight	510.1 x 308 x 37.9 mm, 4.kg	
Dimension Carton ((W x D x H))	610 x 405 x 160 mm	
Colour		
	Black	
OS		
	Windows 10, Linux (depend to the related Linux-Distribution)	

Note: Specifications are subject to change without notice. Product photos and pictures are for illustration purposes only and may differ from the real product's appearance.



Dimensions

MCM-422

